

SF10 Series




Cable connector
Mate with SF1011, SF1012,
SF1015

SF1010 / P — **SF1010 / S** —



Male contact

Cable outer diameter range
I: 3-4mm, II: 4-6.5mm
Number of contact
Female contact

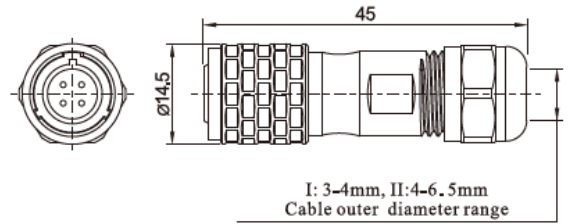


In-line cable connector
Mate with SF1010

SF1011 / P — **SF1011 / S** —

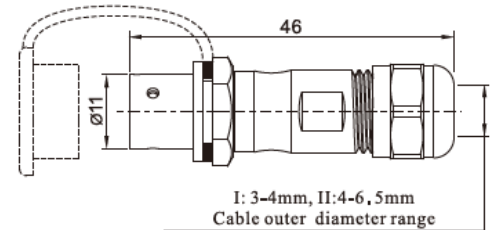


Rear-nut mount
Mate with SF1010

SF1012 / P — **SF1012 / S** —

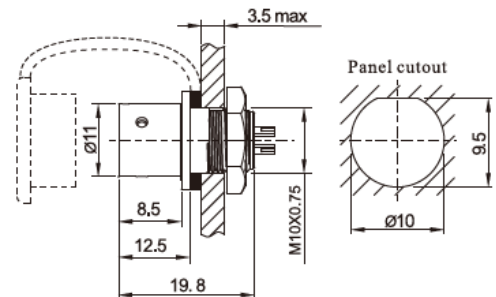

Front-nut mount
Mate with SF1010

SF1015 / P — **SF1015 / S** —

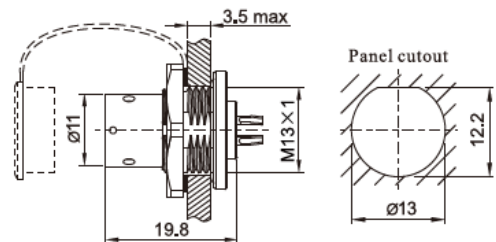

Solder contact spec

Number of contact	2	3	4	5
Male contact face view				
Rated current (A)	5	5	3	3
Contact diameter(mm)	Ø1×2	Ø1×3	Ø0.7×4	Ø0.7×5
Rated voltage (AC.V)	180	180	125	125
Test voltage(AC.V) 1 min	1000	1000	1000	1000
Contact resistance(mΩ)	5	5	10	10
Wire size (mm²/AWG)	≤0.75/18	≤0.75/18	≤0.5/20	≤0.5/20