

SF6 Series




Cable connector
Mate with SF611B, SF612B, SF615B

SF610B/P

SF610B/S

Male contact


Cable outer diameter range
I: 2-3mm, II: 3-4mm
Number of contact
Female contact

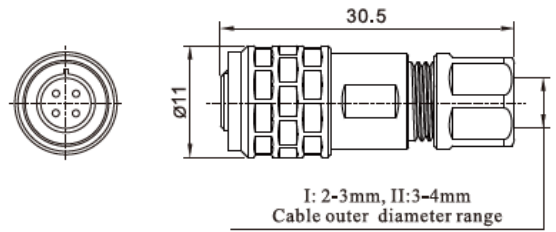

In-line cable connector
Mate with SF610B

SF611B/P


SF611B/S

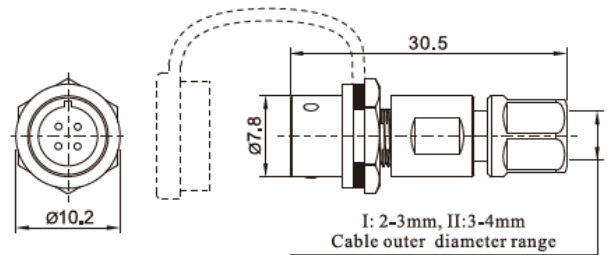

Rear-nut mount
Mate with SF610B

SF612B/P


SF612B/S

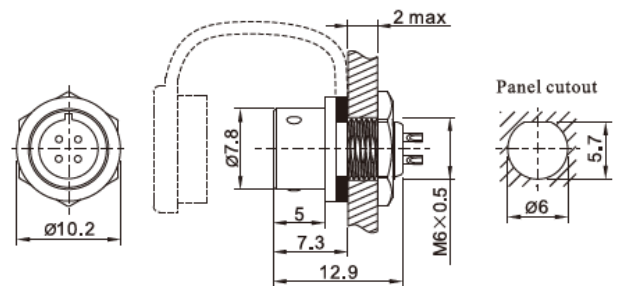

Front-nut mount
Mate with SF610B

SF615B/P

SF615B/S

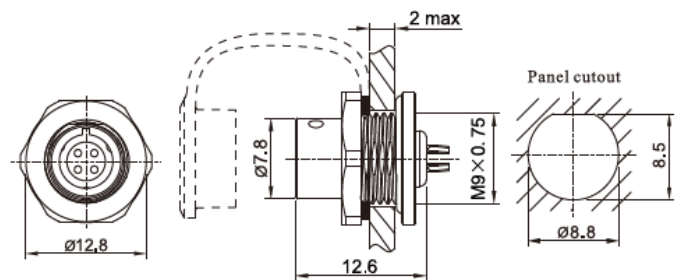

Solder contact spec

Number of contact	2	3	4	5
Male contact face view				
Rated current (A)	3	3	3	3
Contact diameter(mm)	Ø0.6×2	Ø0.6×3	Ø0.6×4	Ø0.6×5
Rated voltage (AC.V)	30	30	30	30
Test voltage(AC.V) 1 min	500	500	500	500
Contact resistance(mΩ)	10	10	10	10
Wire size (mm ² /AWG)	≤ 0.5/20	≤ 0.5/20	≤ 0.5/20	≤ 0.5/20