

SF8 Series




Cable connector
Mate with SF811B, SF812B,
SF815B

SF810B/P SF810B/S


Male contact

Cable outer diameter range
I: 3-4mm, II: 4-5mm
Number of contact
Female contact

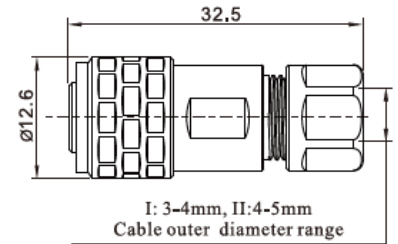


In-line cable connector
Mate with SF810B

SF811B/P SF811B/S

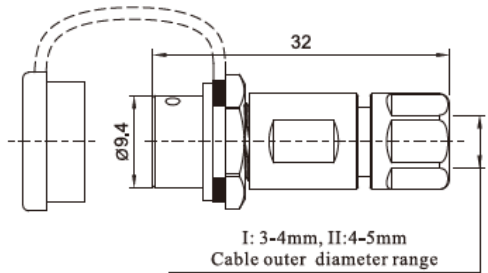


Rear-nut mount
Mate with SF810B

SF812B/P SF812B/S

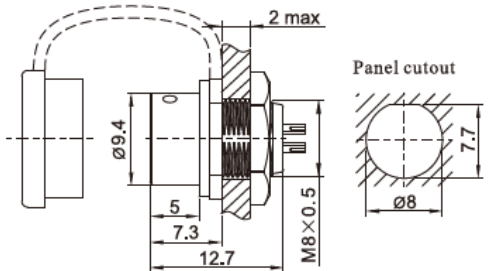

Front-nut mount
Mate with SF810B

SF815B/P SF815B/S

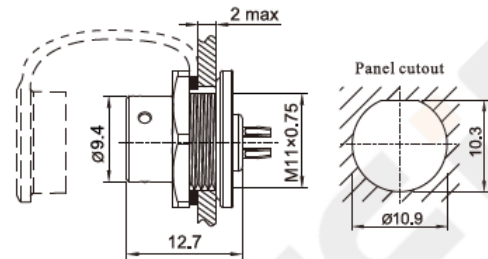

Solder contact spec

Number of contact	2	3	4	6	8
Male contact face view					
Rated current (A)	5	5	3	3	3
Contact diameter(mm)	1×2	1×3	0.6×4	0.6×6	0.6×8
Rated voltage (AC.V)	125	125	30	30	30
Test voltage(AC.V) 1 min	1000	1000	500	500	500
Contact resistance(mΩ)	5	5	10	10	10
Wire size (mm ² /AWG)	≤0.75/18	≤0.75/18	≤0.5/20	≤0.5/20	≤0.5/20