

NICKEL, SCREW TOGETHER HOODS, 45° ENTRY

D45ZK SERIES

TECHNICAL SPECIFICATIONS

Material: Zinc, Nickel Plated
 Operating Temperature: -40°C to +120°C
 Cable Entry: 45° Side Entry
 Thumbscrews: UNC 4-40 (standard)
 Cable Diameter: Up to 13mm (Size 9-37)
 Up to 17mm (Size 50)


FEATURES

- Available in sizes 9-15-25-37-50
- Excellent EMI Shielding
- Re-openable
- Strain relief inserts ensure a secure termination



Size	Product Code
9-way	D45ZK9-K
15-way	D45ZK15-K
25-way	D45ZK25-K
37-way	D45ZK37-K
50-way	D45ZK50-K

Size	Dim A	Dim B	Dim C
9-way	31,0	36,3	14,5
15-way	39,5	40,3	14,5
25-way	53,2	40,3	14,5
37-way	69,7	40,3	14,5
50-way	67,4	44,9	17,4

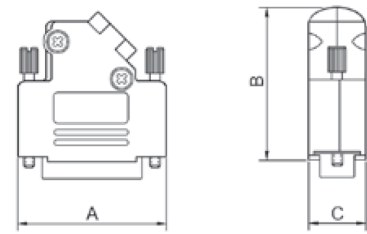

BLACK, SCREW TOGETHER HOODS, 45° ENTRY

D45ZK-BK SERIES

TECHNICAL SPECIFICATIONS

Material: Zinc, Black
 Operating Temperature: -40°C to +120°C
 Cable Entry: 45° Side Entry
 Thumbscrews: UNC 4-40 (standard)
 Cable Diameter: Up to 13 mm

FEATURES

- Available in sizes 9-15-25-37
- Excellent EMI Shielding
- Re-openable
- Strain relief inserts ensure a secure termination



Size	Product Code
9-way	D45ZK9-BK-K
15-way	D45ZK15-BK-K
25-way	D45ZK25-BK-K
37-way	D45ZK37-BK-K

Size	Dim A	Dim B	Dim C
9-way	31,0	36,3	14,5
15-way	39,5	40,3	14,5
25-way	53,2	40,3	14,5
37-way	69,7	40,3	14,5

