





R&H Exhaust Filter GV250

Austrittsfilter
Exhaust filters

GV 250



Technische Daten / Technical data:	
Temperaturbereich Temperature range	-20...+65°C
Farben colours	RAL 7035 (Standard), RAL 7032
Schutzart Degree of protection	IP 54 mit P15/350S IP 54 with P15/350S
	IP 55 mit Z-Line Filter und Streckmetall, UV-beständiges Frontgitter IP 55 with Z-Line Filter and expanded metal, UV-resistant front grille
Zulassung Approval	UL (IP 54), CE

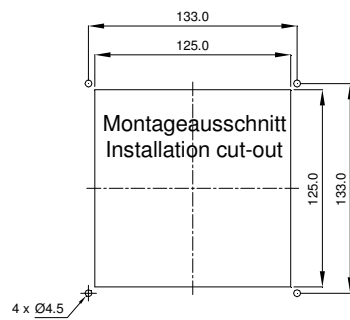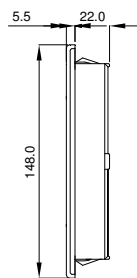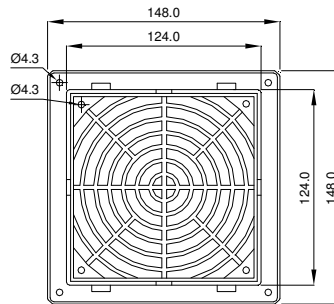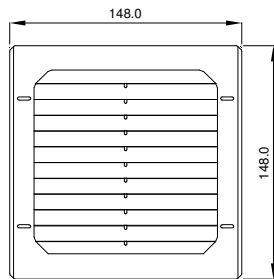

Bohrungen nur bei Schraubbefestigung
Drill-holes are only necessary if fan is to be fastened with screws

Zubehör / Accessories:

Dichtung / **gasket** (enthalten / **included**)
Ersatzfiltermatte / **Replacement filter mat**

D 250
AM 0135P, AM 01P, ZF 250

Rev. 03/09