

PLASTIC SCREW TOGETHER D HOOD + HIGH DENSITY SOLDER MALE

TECHNICAL SPECIFICATIONS

D-SUB HOOD, PLASTIC SCREW TOGETHER, BLACK





Material:	Polycarbonate UL94 V-0
Temperature range:	-55°C to +105°C
Cable strain relief:	Grommets 4,5,7 and 9mm, Polycarbonate UL94 V-0
Cable diameter:	3.0 - 13.0 mm
Locking screws:	Long jackscrews with moulded plastic knob for colour coding. UNC4-40 as standard. M2.5, M2.6 and M3.0 are optional
Cable outlet:	Straight

MALE HIGH DENSITY CONNECTOR SOLDER CUP, STAMPED

Insulator:	Glass filled Polyester, Black UL94 V-0
Shell:	Stamped Steel, Tin Plated
Contact pins:	Copper Alloy
Machined pins:	100 inserts min.
Contact plating:	Selective Gold over Nickel
Contact current rating:	2 Amps max
Contact resistance:	25mΩ max
Operating temperature:	-55°C to +105°C
Withstanding voltage:	500V AC for 1 minute
Insulator resistance:	500MΩ min (At 500V DC)

MALE HIGH DENSITY CONNECTOR SOLDER CUP, MACHINED

Insulator:	Glass filled Polyester, Black UL94 V-0
Shell:	Stamped Steel, Tin Plated
Contact pins:	Copper Alloy
Machined pins:	500 inserts min.
Contact plating:	Selective Gold over Nickel
Contact current rating:	5 Amps max
Contact resistance:	25mΩ max
Operating temperature:	-55°C to +105°C
Withstanding voltage:	1000V AC for 1 minute
Insulator resistance:	1000MΩ min (At 500V DC)

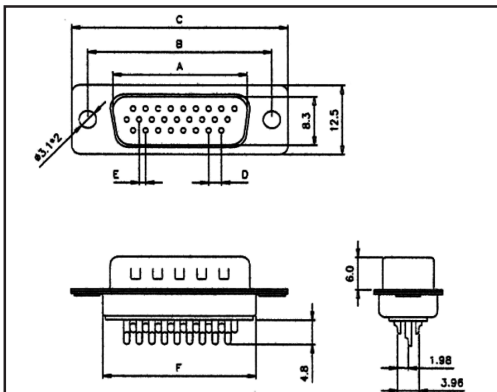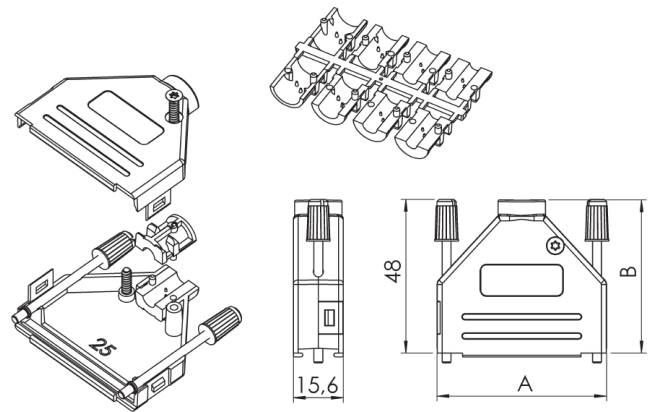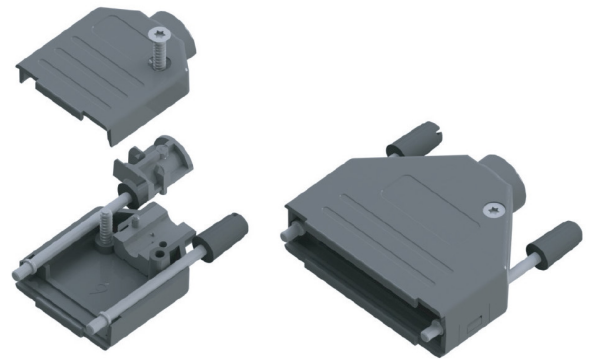

Size	A	B	C	D	E	F
HD15	16,92	25,00	30,8	2,29	1,14	19,2
HD26	25,25	33,30	39,2	2,29	1,14	27,7
HD44	38,96	47,10	53,1	2,29	1,14	41,1
HD62	55,42	63,50	69,4	2,41	1,20	57,3

Size	Dim A	Dim B
9-way	31,0	38,3
15-way	39,3	40,5
25-way	53,0	47,8
37-way	69,5	52,2

HOOD + STAMPED ECONOMY CONTACT CONNECTOR

Size	Product Code
9-way	OS-DTPPK9-HDB15P-K
15-way	OS-DTPPK15-HDB26P-K
25-way	OS-DTPPK25-HDB44P-K
37-way	OS-DTPPK37-HDB62P-K

HOOD + MACHINED HIGH QUALITY CONTACT CONNECTOR

Size	Product Code
9-way	OS-DTPPK9-HDM15P-K
15-way	OS-DTPPK15-HDM26P-K
25-way	OS-DTPPK25-HDM44P-K
37-way	OS-DTPPK37-HDM62P-K