

**SA
8**

SA8 Series





Cable connector
Mate with SA811, SA812,
SA815

SA810 / P SA810 / S


Male contact

- Colour:
- B: Black
- S: Silver
- L: Blue (special order)
- G: Green (special order)
- R: Red (special order)
- Cable outer diameter range
- I: 3-4mm, II: 4-5mm
- Number of contact
- Female contact





In-line cable connector
Mate with SA810

SA811 / P SA811 / S

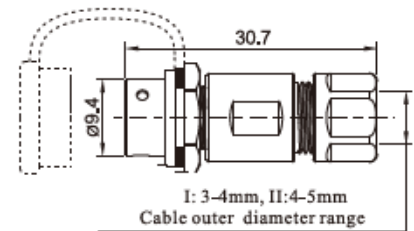




Rear-nut mount
Mate with SA810

SA812 / P SA812 / S



Front-nut mount
Mate with SA810

SA815 / P SA815 / S



Solder contact spec

Number of contact	2	3	4	6	8
Male contact face view					
Rated current (A)	5	5	3	3	3
Contact diameter(mm)	Ø1×2	Ø1×3	Ø0.6×4	Ø0.6×6	Ø0.6×8
Rated voltage (AC.V)	125	125	30	30	30
Test voltage(AC.V) 1 min	1000	1000	500	500	500
Contact resistance(mΩ)	5	5	10	10	10
(mm /AWG) Wire size(mm ² /AWG)	≤0.75/18	≤0.75/18	≤0.5/20	≤0.5/20	≤0.5/20