

### SCREW TOGETHER HOODS, TOP ENTRY

### C88E3 SERIES

Northern Technologies

#### TECHNICAL SPECIFICATIONS


Material: UL Recognised Plastic Material  
 Plating: Nickel over Copper  
 Operating temperature: -40°C to +120°C  
 Cable entry: Top Entry  
 Thumbscrews: UNC 4-40  
 Cable diameter: Up to 16.5 mm\*

\*For specific values - see dimensions below




#### FEATURES

- Available in sizes 9-15-25-37-50
- Re-openable
- Strain Relief/Compression Insert manufactured in Thermoplastic compound



Compression Inserts - Inner Diameters:

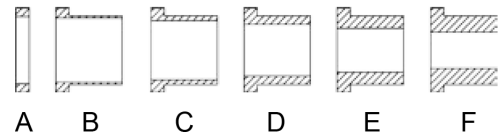

Size	Product Code
9-way	C88E300000
15-way	C88E310000
25-way	C88E320000
37-way	C88E330000
50-way	C88E340000

Size	Dim A	Dim B	Dim C	Dim D
9-way	31,3	40,0	16,3	16,3
15-way	39,1	43,5	16,3	16,3
25-way	53,1	47,7	18,0	16,3
37-way	69,3	53,9	23,0	16,3
50-way	67,2	50,8	23,9	19,6

Size	A	B	C	D	E	F
9-way	8,10	8,00	7,25	6,50	5,30	-
15-way	8,10	8,00	7,25	6,50	5,30	-
25-way	11,40	10,40	9,40	7,60	5,80	-
37-way	16,50	15,75	14,50	12,70	10,80	8,90
50-way	16,50	15,75	14,50	12,70	10,80	8,90

### SCREW TOGETHER HOODS, 45° ENTRY

### C88E2 SERIES

Northern Technologies


#### TECHNICAL SPECIFICATIONS

Material: UL Recognised Plastic Material  
 Plating: Nickel over Copper  
 Operating temperature: -40°C to +120°C  
 Cable entry: Side Entry  
 Thumbscrews: UNC 4-40  
 Cable diameter: Up to 16.5 mm




#### FEATURES

- Available in sizes 9-15-25-37
- Re-openable
- Strain Relief/Compression Insert manufactured in Thermoplastic compound



Compression Inserts - Inner Diameters:

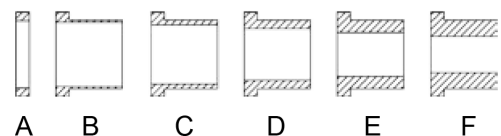

Size	Product Code
9-way	C88E200000
15-way	C88E210000
25-way	C88E220000
37-way	C88E230000

Size	Dim A	Dim B	Dim C	Dim D
9-way	31,3	40,0	16,3	16,3
15-way	39,1	43,5	16,3	16,3
25-way	53,1	47,7	18,0	16,3
37-way	69,3	53,9	23,0	16,3

Size	A	B	C	D	E	F
9-way	8,10	8,00	7,25	6,50	5,30	-
15-way	8,10	8,00	7,25	6,50	5,30	-
25-way	11,40	10,40	9,40	7,60	5,80	-
37-way	16,50	15,75	14,50	12,70	10,80	8,90